

SoliTek SUPREME 260-270 OP

Glass/Glass monocrystalline 60 cell module

Glass/Glass modules – advanced choice for those who look for durability, safety, efficiency.

KEY FEATURES



30+ year lifetime. Edge-sealant protection assures superior atmospheric and humidity resistance.



Back glass instead of plastic assures durability and robust protection against UV, moisture, ammonia and salt corrosion.



Higher heat dispending. Glass is better thermal conductor than plastic back-sheet in standard modules ensuring higher efficiency in hot climate.



Possibility to **bond the PV modules** with adhesive material.



100% PID free cells. Potential induced degradation is eliminated at cell level using PVB lamination foil.




Wider light spectrum absorbed. PVB lamination foil utilise light spectrum starting from 280nm.



Customised choice. Range of dimensions, forms, colours and efficiency for BIPV solutions.

LAMINATION FOIL:



Optimized by solar_{edge}

Why Glass/Glass technology?

Glass/Glass (G/G) modules are produced by laminating PV cells between two glasses, instead of standard glass and plastic.

In comparison with standard modules, the same glass material resistance and heat dispending is more durable in fluctuating temperatures, hot and humid climate zones, ensuring 30-40 years lifetime.

Unlike other G/G modules in the market, SoliTek uses innovative edge-sealant technology to protect PV cells from humidity.

PV cells are manufactured in-house using advanced technologies ensuring elimination of potential induced degradation (100% PID free cells).


Both SoliTek cells and modules are manufactured using green energy – geothermal, solar and hydro power.

RELIABLE QUALITY

- Positive power tolerance 0-3%
- 100% double sorting ensures modules are defect free
- Fully automated production lines eliminates human mistakes
- Manufactured and assembled in EU (Vilnius, Lithuania)

MANUFACTURER WARRANTY

- 20 years product warranty
- 30 years performance warranty at 80% output
- 2 years all risk insurance. Available for the following countries: Germany, Austria, Switzerland, Liechtenstein, Luxemburg, UK, France and North Italy

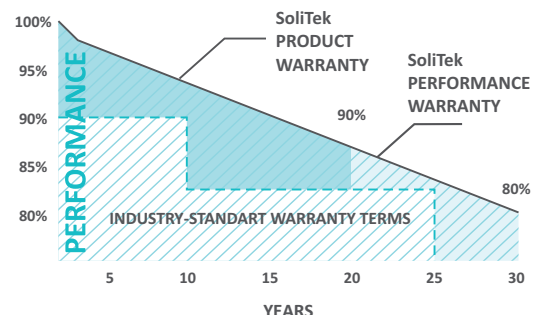

SoliTek SUPREME 260-270 OP

Glass/Glass monocrystalline 60 cell module

MECHANICAL PARAMETERS

Cell (mm)	Mono 156x156
Weight (kg)	20.5 (approx)
Dimensions (LxWxH) (mm)	1673x991x5,4
Cable Cross Section Size (mm ²) / Plugs	6 / MC4 compatible
No. of Cells in the Line	60 (10x6)
Junction Box	SolarEdge J-Box
Front / Back Glass (mm)	2,1 / 2,1
Packaging Configuration	16 per pallet




WORKING CONDITIONS

Maximum System Voltage	DC 1000V (TÜV)
Operating Temperature	-40 °C~+85°C
Maximum Reverse Current	15A
Maximum Static Load, Front (wind / snow)	2400Pa / 5400Pa
NOCT	43,6°C
Application Class	Class A


ELECTRICAL PARAMETERS

TYPE	SoliTek SUPREME 260 - 270 OP	SoliTek SUPREME 260 - 270 OP	SoliTek SUPREME 260 - 270 OP
Rated Maximum Power at STC (Wp)	260	265	270
Open Circuit Voltage (Voc/V)	38.22	38.40	38.80
Maximum Power Voltage (Vmp/V)	30.90	31.15	31.40
Short Circuit Current (Isc/A)	8.90	8.97	9.01
Maximum Power Current (Imp/A)	8.41	8.51	8.60
Module Efficiency [%]	15.37	15.67	15.96
Power Tolerance	0+3%	0+3%	0+3%
Temperature Coefficient of Isc (αIsc)	+0.05%/°C	+0.05%/°C	+0.05%/°C
Temperature Coefficient of Voc (βVoc)	-0.34%/°C	-0.34%/°C	-0.34%/°C
Temperature Coefficient of Pmax (γPmp)	-0.42%/°C	-0.42%/°C	-0.42%/°C
STC	Irradiance 1000W/m ² , Module Temperature 25°C, AM 1.5		
Fire safety	VDE-AR-E 2100-712		

I-V CURVE



Produced according to IEC 61215:2005, IEC 61730: 2004 standard

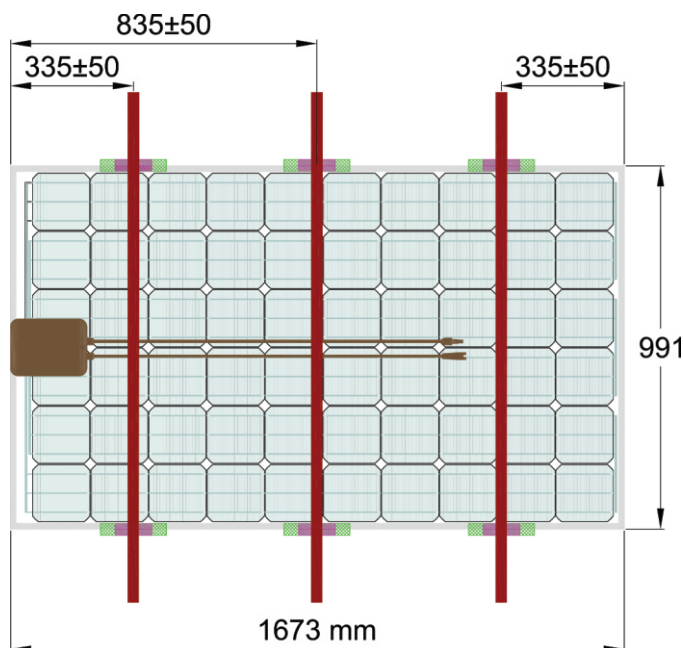



ENGINEERING DRAWING

The module is certified with Alumero Click 5.0 L-100 clamps.

Approved for:

- 2400 Pa snow load
- 5400 Pa wind load

-  clamp area
-  clamp mounting area

Specifications subject to technical changes and tests. Manufacturer reserves the right of final interpretation.